


Bollard 300

BOL300

DESCRIPTION

The Bollard 300 is ideal for gardens, driveways, walkways, car parks, etc. The lens has a mirror finished, twin angle reflector and UV stable acrylic lens with anti-glare mesh. This lens reflects light at two angles, directly onto the ground and horizontally to illuminate the surrounding landscape.

Anti-glare hood is available for all Bollards except 316 stainless steel.

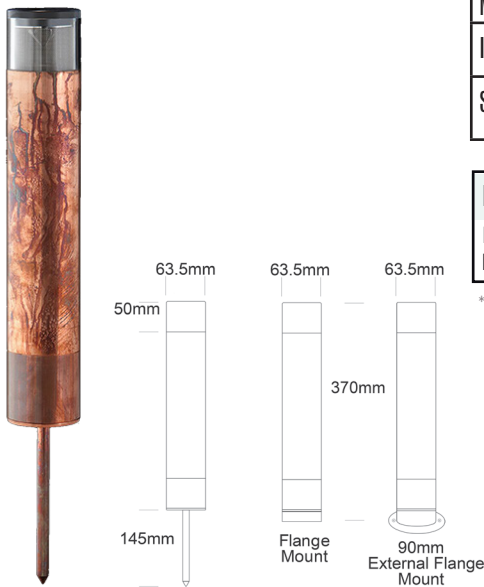

PURE LED	
LED Chip	Cree XHP-50-2 Plug and Play field replaceable LED board, 6Vf
Output	510 lumens @ 1050mA max
Lumens Per Watt	85lm/W
Power Consumption	6 watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	360 degrees

*Specification for pureled only for retrofit lamp options please see alternative lamps page.


PHYSICAL PROPERTIES	
Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP56/IP66
Standards	AS/NZS 61046, UL 1838, 2108, CSA C22.2 No. 250.7, 250.0-08, CE

POWER SUPPLY OPTIONS	
DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** I TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)*** NO DRIVER REQ FOR GU10	

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

CATEGORY
POLE MOUNTED

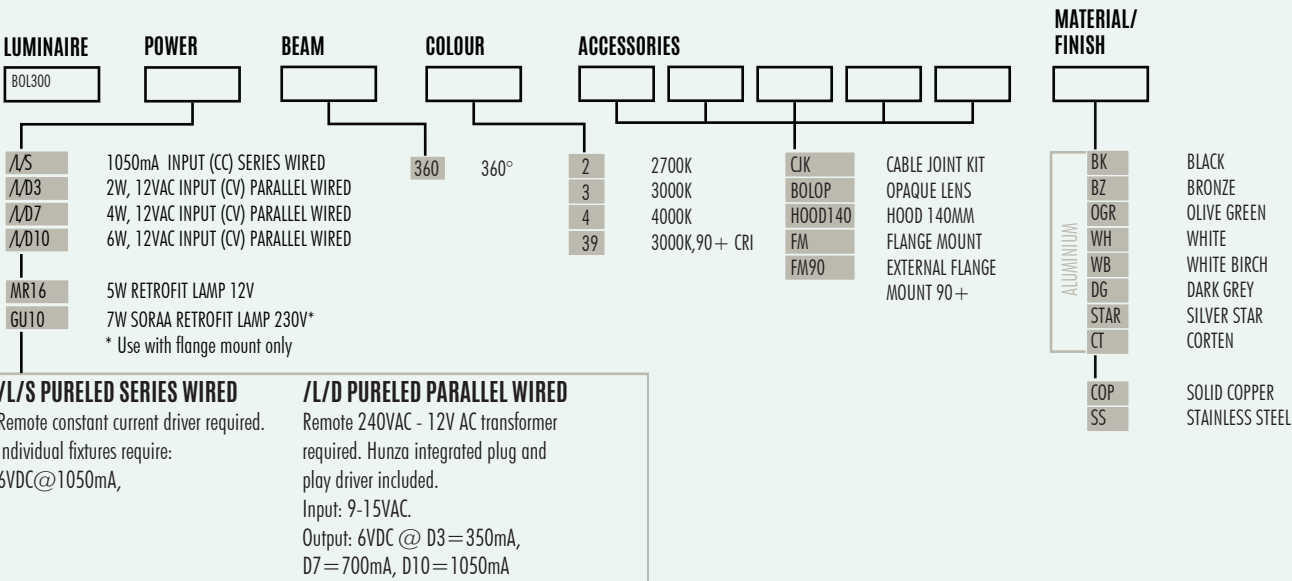

PRODUCT CONFIGURATION