

Tilting Eave Light 6 Watt

EAVE/T6

DESCRIPTION

The Tilting Eave Light 6 watt is a recessed downlight ideal for installation in eaves, soffits, entrance ways, verandahs, carports or covered decks. It can also be used in bathrooms, kitchens or where moisture transfer or decibel rating is a minimum requirement. The "Eyeball" allows 360 degree rotation and 25 degree tilt from centre.

PURE LED

LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	600 lumens @ 1050mA max
Lumens Per Watt	100lm/W
Power Consumption	6 Watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees

*Specification for pureled only, there are no other alternative lamp sources for this fixture.

PHYSICAL PROPERTIES


Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP66
Standards	AS/NZS 61046, UL2108

POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

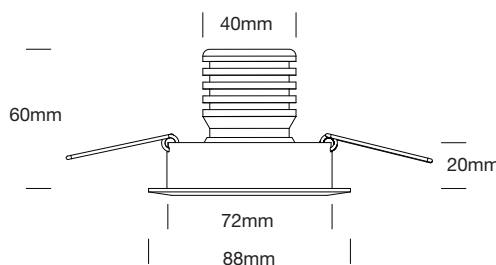

CATEGORY
CEILING MOUNT

LUMINAIRE

EAVE/T6

- /L/S
- /L/D3
- /L/D7
- /L/D10
- /L/DC7

- 1050mA INPUT (CC) SERIES WIRED
- 2W, 12VAC INPUT (CV) PARALLEL WIRED
- 4W, 12VAC INPUT (CV) PARALLEL WIRED
- 6W, 12VAC INPUT (CV) PARALLEL WIRED
- 4W, 9-36VDC INPUT (CV), PALLE WIRED

BEAM

COLOUR

- 15
- 25
- 38
- 60

- 15°
- 25°
- 38°
- 60°

ACCESSORIES

- 2
- 3
- 4

- 2700K
- 3000K
- 4000K

CIK

CABLE JOINT KIT

MATERIAL/ FINISH

- BK
- BZ
- OGR
- WH
- WB
- DG
- STAR
- CT
- COP
- SS

- BLACK
- BRONZE
- OLIVE GREEN
- WHITE
- WHITE BIRCH
- DARK GREY
- SILVER STAR
- CORTEN
- SOLID COPPER
- STAINLESS STEEL

/L/S PURELED SERIES WIRED

Remote constant current driver required.
Individual fixtures require:
6VDC@1050mA,
1050mA maximum

/L/D PURELED PARALLEL WIRED

Remote 240V - 12VAC transformer required.
Hunza integrated plug and play driver
included.
Input: 9-15VAC.
Output: 6VDC @ D3=350mA,
D7=700mA, D10=1050mA

/L/DC PURELED PARALLEL WIRED

Remote 240V - 24VDC transformer
required. Hunza integrated plug and play
driver included.
Input: 9-36VDC.
Output: 6VDC @ DC7=700mA,

PRODUCT CONFIGURATION